



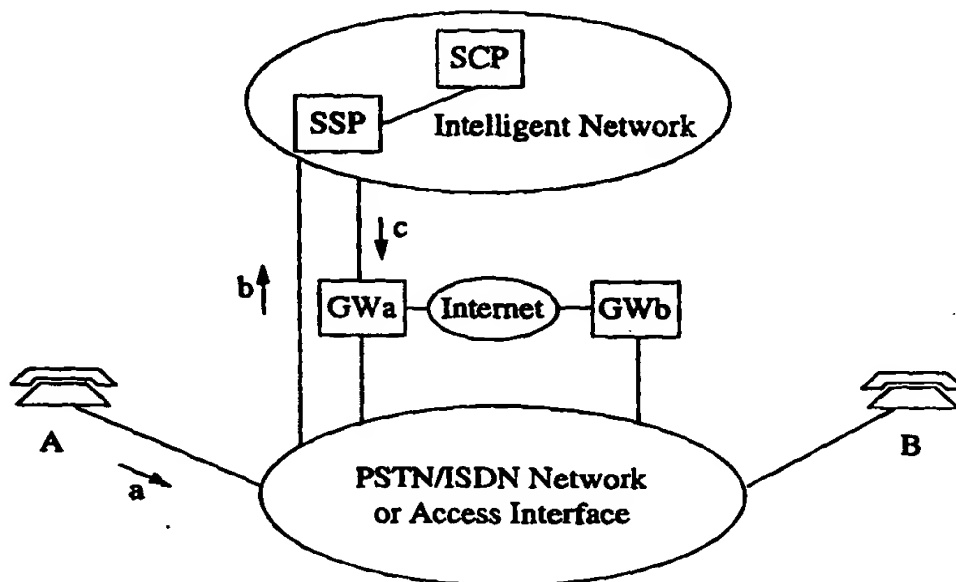
INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 3/00, H04L 12/66		A3	(11) International Publication Number: WO 99/29123
			(43) International Publication Date: 10 June 1999 (10.06.99)
(21) International Application Number: PCT/NO98/00336		(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 11 November 1998 (11.11.98)			
(30) Priority Data: 19975518 1 December 1997 (01.12.97) NO			
(71) Applicant (for all designated States except US): TELEFONAKTIEBOLAGET LM ERICSSON [SE/SE]; S-126 25 Stockholm (SE).			
(72) Inventors; and (75) Inventors/Applicants (for US only): BREIVIK, Øyvind [NO/NO]; Drammensveien 50C, N-0271 Oslo (NO). FJUK, Paul, Torkil [NO/NO]; Hellaveien 79, N-2013 Skjetten (NO).			
(74) Agent: OSLO PATENTKONTOR AS; Postboks 7007 M, N-0306 Oslo (NO).		<p>Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	
		(88) Date of publication of the international search report: 12 August 1999 (12.08.99)	

(54) Title: METHOD FOR IMPROVING THE SETUP OF TELEPHONE-TO-TELEPHONE CALLS

(57) Abstract

The present invention relates to a method for improving the setup of telephone-to-telephone calls using telephones connected to a PSTN/ISDN access network and using a separate network, especially Internet as a substantial by-pass network, special telephone gateways (GW) forming bridges between the access network and said by-pass network, and connections being established between the user telephones (A, B) and the gateways (GW) that bridge the call, and for the purpose of handling call establishment in only one phase, as well as making use of associated Intelligent Networks more efficiently, it is according to the present invention suggested that for the purpose of making the gateways transparent to the caller (A), the method allows the caller (A) to dial a by-pass network service prefix together with the number of the callee (B).



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Licchtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD FOR IMPROVING THE SETUP OF TELEPHONE-TO-TELEPHONE
CALLS

5 Field of the invention

Generally, the present invention relates to Internet telephony and intelligent networks (IN) function.
More specifically, the present invention relates to a
10 method for improving the setup of telephone-to-telephone calls using telephones connected to a PSTN/ISDN access network and using a separat network, especially Internet as a substantial by-pass network, special telephone gateways (GW) forming bridges between the access network
15 and said by-pass network, and connections being established between the user telephones (A,B) and the gateways (GW) that bridge the call.

20 Background of the invention

The application area of the present invention has been developed in connection with low tariff international telephone-to-telephone calls using the Internet as the main
25 carrier network, but the general aspect of the invention may also be related to any quality of service required.

Furthermore, the present invention is applicable not oly to international and long distance services but also to
30 any other geographically segmented services (e.g. local, regional, national).

Users have telephones connected to the PSTN/ISDN network. The Internet can be used to carry portions of the traditional PSTN/ISDN telephone-to-telephone calls. Special
35 Internet telephony gateways GW form bridges between the PSTN/ISDN access network and the Internet (which acts as the carrier network).

In a traditional telephone-to-telephone call, a connection between two parties is established at the call set-up phase. The originating party and the terminating party are identified by their respective telephone numbers (caller A-num and callee B-num) during the set-up phase. Call logic is handled by the PSTN/ISDN network. In a telephone-to-telephone call using the PSTN/ISDN network as the access network and the Internet as the main carrier network, connections must be established between the user telephones and the gateways that bridge the call. The present invention presents a solution to the handling of call-establishment to the originating gateway. Extensions and enhancements to the basic invention are described later.

Prior art

Existing solution and problems with these

Referring to Figure 1, there will now be given a description about how a traditional international call path is established.

The known solutions handle call establishment in two phases. First, the caller (A) is required to set up a connection to a preferred originating gateway (Gwa). Second, the caller is required to dial the desired number that identifies the terminating telephone (B-num).

As an illustration, a typical, although simplified, call handling sequence is as follows:

1. The caller (A) obtains a PSTN/ISDN connection to an originating gateway (Gwa) by dialing the gateway number.
2. Gwa sends a new dial tone or a voice message to A to indicate that the connection has been established.

3. The caller (A) dials the number that identifies the
callee (B). (The gateway may extract the B-number from
the connection by interpreting Dual Tone Multiple
Frequency (DTMF) signals. Prior to this A may need to
5 enter a PIN number or similar for authorization
purposes).
 4. Gwa performs a number analysis on the B-number to
find the closest GW (Gwb) to B.
 5. Gwa establishes a data connection (connection
10 oriented or connectionless) to the terminating gateway
(Gwb) and transfers the B-number to Gwb using the data
network.
 6. Gwb in turn establishes the final PSTN/ISDN
connection to the called party (B).
- 15 One advantage of the known solutions, in this context, is
that they make use of standard PSTN/ISDN functions.
However, the known solutions require the caller to handle
the call set up in two distinct phases which is
cumbersome. The caller is also required to know the
20 telephone number of the preferred (i.e., closest) gateway.
Indeed, the caller may need to keep a list of gateway
telephone numbers if the preferred one is busy, or if it
is down, or if other circumstances make it unavailable.
- There are also other problems to the known solutions.
25 These are addressed in a later chapter which provides
extensions to the present invention described prior
thereto.

Objects of the present invention

- 30 An object of the present invention is to provide a method
for improving the setup of telephone-to-telephone calls in
relation to the prior art procedures.

Another object of the present invention is to provide a method by which the caller is allowed to handle the call set-up in one single phase, as in the case of traditional "local" telephone calls.

- 5 More specifically, an object of the present invention is to make the associated gateways transparent to the caller.

Still another object of the present invention is to utilize Internet telephony and intelligent networks (IN) functions in a far more efficient and less costly manner.

10

Brief disclosure of the invention

- The above objects are achieved in a method as stated in the preamble, which according to the present invention is characterized in that for the purpose of making the gateways transparent to the caller (A) the method allows the caller (A) to dial a by-pass network service prefix together with the number of the callee (B).

- 15 More specifically, it is according to the invention suggested that said by-pass network service prefix, i.e. an IN service prefix is adapted to identify the relevant IN service for thereby routing the call to an IN node which can execute this IN service.

- 20 In other words, the present invention allows the caller to handle the call set-up in one single phase, just as in case of conventional telephone calls, at the same time as the gateways appear transparent to said caller.

- 25 Further features and advantages of the present invention will appear from the following description taken in conjunction with the enclosed drawings, as well as from the appending patent claims.

35

Brief disclosure of the drawings

Fig. 1 is a sketch illustrating a traditional international call path.

5

Fig. 2 is a sketch illustrating an embodiment of the method according to the present invention.

10 Detailed description of embodiments

Fig. 1 illustrates a traditional international call path, which has been discussed previously, and wherein the set-up of telephone-to-telephone calls are made using
15 telephones connected to a PSTN/ISDN access network and using a separate network, here the Internet as a substantial by-pass network, special telephone gateways GWa and GWb forming bridges between the access network and said by-pass network, and connections being established between
20 a caller telephone A and a callee telephone B through appropriate gateways GWa and GWb.

An embodiment of the present method is illustrated in Fig. 2, wherein the handling of call establishment will
25 only take place in one phase.

More specifically, the present solution uses the Intelligent Network to:

30 1. Allow the user to establish a call in one single phase.

The user dials one number: IN service prefix + B-number.
IN service prefix identifies the IN service:

'International calls over the Internet'. IN service prefix is used to route the call to the IN node which executes
35 this IN service.

2. Automatically find the closest/available gateway

The IN service 'International calls over the Internet' will find the closest GW by analysing the A-number. The service can also route to alternative Gws if the closest is busy, etc.

5 3. Establish call to the GW

The IN service will establish the call to GW, hereby named Gwa. In the call setup the Gwa number is included as destination number. In addition, the A and B-number is included.

10 A proposal/example on how this can be transferred on ISUP
(IAM message)/DSS1 (SETUP message):

```
CallingPartyNumber:  A-number
CalledPartyNumber:   Gwa-number
RedirectingNumber:    B-number
```

15' The information flow (see Figure 2) is as follows:

a = A dials: (IN service prefix + B-number) in one sequence

b = Call routed to IN:

20 CallingPartyNumber: A-number
 CalledPartyNumber: (IN service prefix +
 B-number)

c = Call routed to Gwa:

25 CallingPartyNumber: A-number
 CalledPartyNumber: Gwa-number
 RedirectingNumber: B-number

Restrictions

1. The invention couples gateway functionality with IN
30 which makes the gateway equipment dependent on IN
functionality. The provider of such a service becomes
dependent on an operator with the specific IN
functionality.

2. Still address analysis in Gwa (see Extensions).

Advantages

- Call establishment in one step only.
- Since IN service logic is coupled to the GW application,
5 value added functionality can easily be included (such as automatically finding the closest or available gateway).
- Number analysis can now be coupled with other services such as short numbers for a virtual network, and UPT.

10 Extensions and enhancements to the present invention

The problem area: Gwa still needs to analyse the B-number to find the GW closest to user B. Having these number analysis functions distributed implies that many Gws must be updated when changes in the network occur. This is a
15 network management problem which the extension to the basic invention solves.

Existing solutions and problems with these: The Gws can perform complete number analysis functions with B-number as input and Gwb address as result. This analysis must
20 then be in every GW and the network will be hard to maintain.

The invention: An extension to the basic invention can be made to solve the problem in such a way as to find the closest terminating gateway for any terminating B- number.
25 IN can be used to locate the terminating gateway. Suppose that A calls a B-number. In addition to finding the E.164 number to Gwa, IN can also find the IP-address to Gwb which is the gateway closest to the user B.

1. The IN maintains a list of the gateways, with their
30 respective IP-address and the respective area code(s).

2. Based on the area code of the B-number the IP-address to the closest GW is found.
3. In the call setup towards Gwa the IP-address of Gwb is included.
- 5 4. Gwa uses the received Gwb IP-address in the remaining call handling process.

A proposal/example on how this can be transferred on ISUP (IAM message)/DSS1 (SETUP message):

```

10      CallingPartyNumber:  A-number
      CalledPartyNumber:   Gwa-number
      RedirectingNumber:   B-number
      Subaddress:  Gwb IP-address

```

The information flow (see Figure 2) is as follows:

```

15      a = A dials: (IN service prefix + B-number)
              in one sequence
      b = Call routed to IN:
              CallingPartyNumber: A-number
              CalledPartyNumber: (IN service prefix +
20                                B-number)
      c = Call routed to Gwa:
              CallingPartyNumber: A-number
              CalledPartyNumber: Gwa-number
              RedirectingNumber: B-number
              Subaddress: Gwb IP-address

```

Broadening

The application has only addressed the Internet as the carrier or bypass network but the application can be broadened to, in general, address networks based on IP-
30 technology and even to other packet based networks or technology, such as Frame Relay, ATM, hybrids of these, and so on.

Furthermore, the present invention is applicable not only to international and long distance services but also to

any other geographically segmented services (e.g. local, regional, national).

5 References

WO-SE00680: "Speech connection set-up method for interconnected networks registering network address of users who has a telephone and PC on network, with telephone system and uses address when making call
10 connection".

Comments: The WO-SE00680 patent is related to this patent application in the sense that it too uses certain IN functions to solve certain addressing problems related to the domain of gateways. Note, however, that it addresses a
15 different problem within this domain. The following is a list to illustrate some of the differences:

- WO-SE00680 addresses an application area that have users connected to special PCs (PC connected telephones) - not plain old PSTN/ISDN telephones.
- 20 • WO-SE00680 uses IN primarily to locate called users using special PCs on a data network - not handle call set-up of telephone-to-telephone calls over the internet in one single phase.
- WO-SE00680 uses a register function to keep track of the
25 location of the users and the gateway that the respective users have registered with - this patent application does not use such an explicit register function.
- WO-SE00680 transfers the IP-address of a called user to the gateway that the user has a priori registered with -
30 In its basic form this application only transfers the B-number of the called user. In its extended form the B-number and the IP-address of the terminating gateway is transferred to the originating gateway for the purpose of addressing locating the nearest gateway.

ETOP97028

P a t e n t c l a i m s

- 5 1. Method for improving the setup of telephone-to-telephone calls using telephones connected to a PSTN/ISDN access network and using a separat network, especially Internet as a substantial by-pass network, special telephone gateways (GW) forming bridges between the access
10 network and said by-pass network, and connections being established between the user telephones (A,B) and the gateways (GW) that bridge the call,
c h a r a c t e r i z e d i n that for the purpose of making the gateways transparent to the caller (A) the
15 method allows the caller (A) in the same one-step procedure to dial a by-pass network service prefix together with the number of the callee (B), i.e. a prefix+B-nummer, and more specifically an IN-service prefix.
- 20 2. Method as claimed in claim 1,
c h a r a c t e r i z e d i n that said by-pass network service prefix, i.e. the IN service prefix is adapted to identify the relevant IN service for thereby routing the call to an IN node which can execute this IN
25 service.
3. Method as claim in claim 1 or 2,
c h a r a c t e r i z e d i n that said IN service is arranged to find the most appropriate, e.g. the closest
30 gateway (GW) by analyzing the caller's number (A), and/or possibly route the call to an alternative gateway if the closest is busy, etc.
4. Method as claimed in any of the preceding claims,
35 c h a r a c t e r i z e d i n that after the IN service has established the call (A) to the most appropriate gateway (GW), (GWa) there is in the call setup included the associated gateway number (GWa) as destination num-

ber, as well as the caller number (A) and the callee number (B).

5 5. Method as claimed in any of the preceding claims,
c h a r a c t e r i z e d i n that the IN service es-
tablishes the call (A) to the most appropriate gateway
(GWa) by coupling gateway functionality with an intelli-
gent network (IN).

10 6. Method as claimed in any of the preceding claims,
c h a r a c t e r i z e d i n that address analysis
is carried out in the gateway (GWa) to which the call has
been routed.

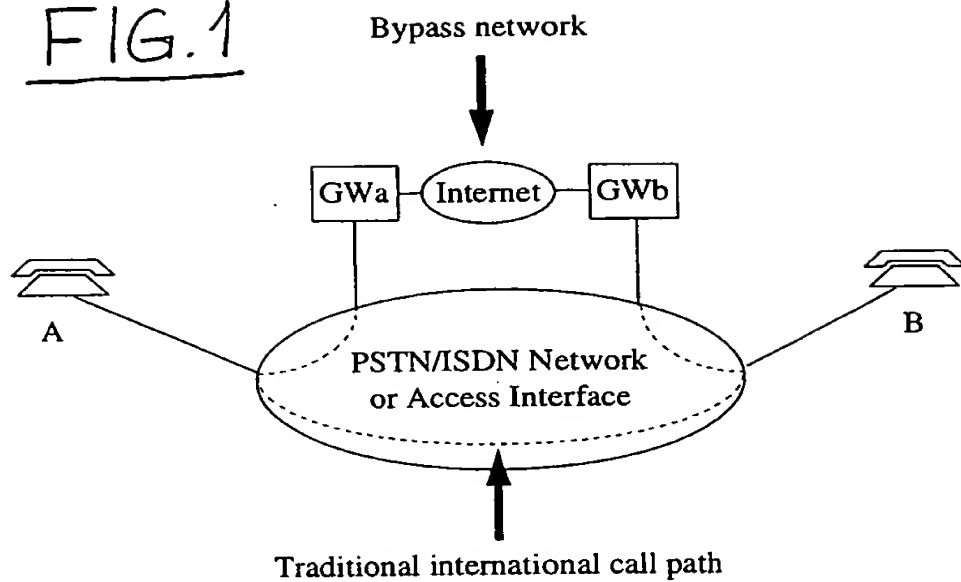
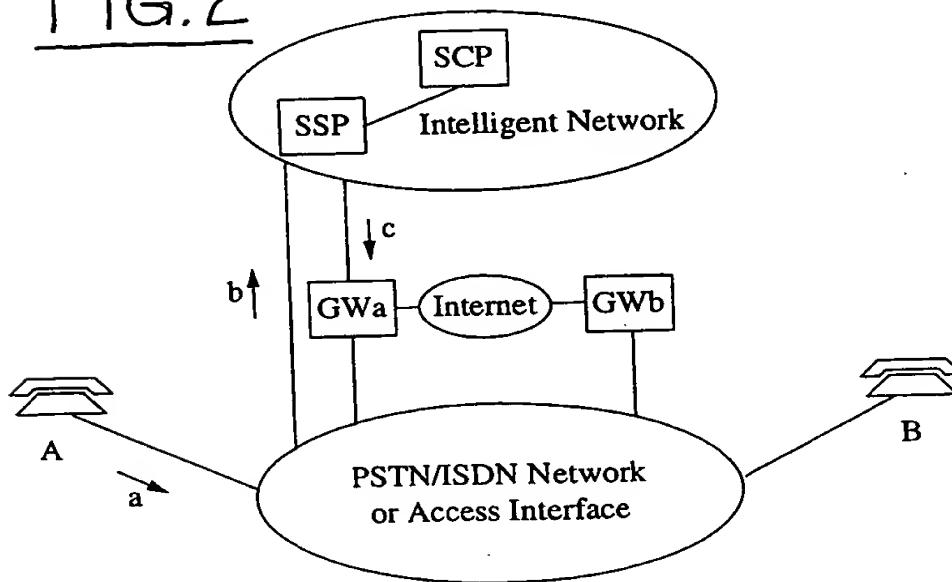
15 7. Method as claimed in any of the preceding claims,
c h a r a c t e r i z e d i n that value added functi-
onality is included by service logic means of the intel-
ligent network (IN), for example the automatic selection
of the most appropriate and/or available gateway.

20 8. Method as claimed in any of the preceding claims,
c h a r a c t e r i z e d i n that number analysis is
coupled with other services, for example short numbers
for virtual network, and UPT.

25 9. Method as claimed in any of the preceding claims,
c h a r a c t e r i z e d i n that the most appropri-
ate gateway for any terminating callee number (B) is car-
ried out in the intelligent network (IN), i.e. by finding
30 the E.164 number to an appropriate gateway (GWa), as well
as the IP (Internet Protocol) address to the gateway
(GWb) closest to the callee (B).

35 10. Method as claimed in any of the preceding claims,
c h a r a c t e r i z e d i n that there is maintai-
ned an updated list of gateways in the by-pass network,
i.e. the intelligent network (IN), as well as a list of
respective IP-addresses and the respective area code(s).

11. Method as claimed in any of the preceding claims,
c h a r a c t e r i z e d i n that the area code of
the number (B) of the callee is used to find the IP-
5 address of the most appropriate callee gateway (GWb), for
example the closest gateway thereof.
12. Method as claimed in any of the preceding claims,
c h a r a c t e r i z e d i n that in the call setup
10 from the intelligent network (IN) towards the access
gateway (GWA) the IP-address of the terminal gateway
(GWb) is included, so that the access gateway (GWA) can
use the received terminal gateway (GWb) IP-address in the
remaining call handling process.
- 15 13. Method as claimed in any of the preceding claims,
c h a r a c t e r i z e d i n that the method allows
any caller (A) to dial a called part (B) via an access
network by only dialling once, i.e. a destination number.
- 20 14. Method as claimed in any of the preceding claims,
c h a r a c t e r i z e d i n that the most appropri-
ate gateway (GWA) or gateways (GWA, GWb) is/are selected
according to the quality of service (QoS) required, or
25 possibly according to other criteria, for example tariff,
availability, etc.

FIG. 1FIG. 2

This Page Blank (uspto)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 98/00336

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 3/00, H04L 12/66

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04Q, H04M, H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9638018 A1 (TELEFONAKTIEBOLAGET LM ERICSSON), 28 November 1996 (28.11.96), see whole document --	1-14
Y	WO 9722210 A2 (HEWLETT-PACKARD COMPANY), 19 June 1997 (19.06.97), page 15, line 14 - page 16, line 13, figure 17 --	1-14
Y	WO 9535632 A1 (BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY), 28 December 1995 (28.12.95), see whole document --	1-14

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

15 June 1999

Date of mailing of the international search report

17 -06- 1999

Name and mailing address of the ISA:

Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Ewa Kowalska/MN
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 98/00336

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>WO 9716007 A1 (TELECOM FINLAND OY), 1 May 1997 (01.05.97), page 4, line 8 - line 23; page 6, line 10 - line 15; page 7, line 9 - line 19, page 14, line 4 - page 15, line 19; abstract</p> <p style="text-align: center;">-- -----</p>	1-14

~~this Page Blank (uspto)~~

INTERNATIONAL SEARCH REPORT

Information on patent family members

01/06/99

International application No.

PCT/NO 98/00336

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9638018 A1	28/11/96	AU 5916696 A	11/12/96
		CA 2221183 A	28/11/96
		CN 1185268 A	17/06/98
		EP 0829181 A	18/03/98
		FI 952557 D	00/00/00
		NO 975343 A	21/01/98
		FI 961690 A	25/11/96
WO 9722210 A2	19/06/97	AU 704385 B	22/04/99
		AU 704503 B	22/04/99
		AU 704508 B	22/04/99
		AU 704569 B	29/04/99
		AU 1104097 A	03/07/97
		AU 1104297 A	03/07/97
		AU 1104697 A	03/07/97
		AU 1181397 A	03/07/97
		CA 2238501 A	19/06/97
		CA 2239408 A	19/06/97
		CA 2239493 A	19/06/97
		CA 2239826 A	19/06/97
		EP 0867091 A	30/09/98
		EP 0867092 A	30/09/98
		EP 0867093 A	30/09/98
		EP 0867094 A	30/09/98
		NO 982510 A	05/08/98
		NO 982511 A	05/08/98
		NO 982512 A	05/08/98
		NO 982514 A	05/08/98
		NZ 324340 A	25/11/98
		WO 9722209 A	19/06/97
		WO 9722211 A	19/06/97
		WO 9722212 A	19/06/97
		GB 9525190 D	00/00/00
		NZ 323992 A	28/10/98
		EP 0792074 A	27/08/97
		GB 9603591 D	00/00/00
WO 9535632 A1	28/12/95	AU 683392 B	06/11/97
		AU 2745895 A	15/01/96
		CN 1151235 A	04/06/97
		DE 69507952 D	00/00/00
		EP 0766898 A,B	09/04/97
		FI 965087 A	18/12/96
		JP 10501664 T	10/02/98
		NZ 288292 A	26/02/98
WO 9716007 A1	01/05/97	AU 7302596 A	15/05/97
		FI 955093 D	00/00/00
		FI 955810 A	26/04/97

This Page Blank (uspto)